

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 738 949 A1

09/498.628

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

23.10.1996 Bulletin 1996/43

(51) Int. Cl.<sup>6</sup>: G06F 3/00, G06F 3/12

(21) Application number: 95116568.7

(22) Date of filing: 20.10.1995

(84) Designated Contracting States:  
DE FR GB

(30) Priority: 19.04.1995 JP 117984/95


(71) Applicant: FUJI XEROX CO., LTD.  
Minato-ku Tokyo 107 (JP)

(72) Inventor: Nakazawa, Toshiya,  
c/o Fuji Xerox Co., Ltd.  
Takatsu-ku, Kawasaki-shi, Kanagawa (JP)

(74) Representative: Grünecker, Kinkeldey,  
Stockmair & Schwanhäusser  
Anwaltssozietät  
Maximilianstrasse 58  
80538 München (DE)

(54) Reconstruction of print job in print system

(57) In a network environment in which a print server, one or more clients, and one or more printers are connected via a network, a print server absorbs the function differences among the printers. The print server supports the printers via the network and if a client user specifies a function not inherent in the printer, reconstructs the print job so as to replace the function specification with a procedure that can be executed on the printer and sends the resultant print job to the printer.

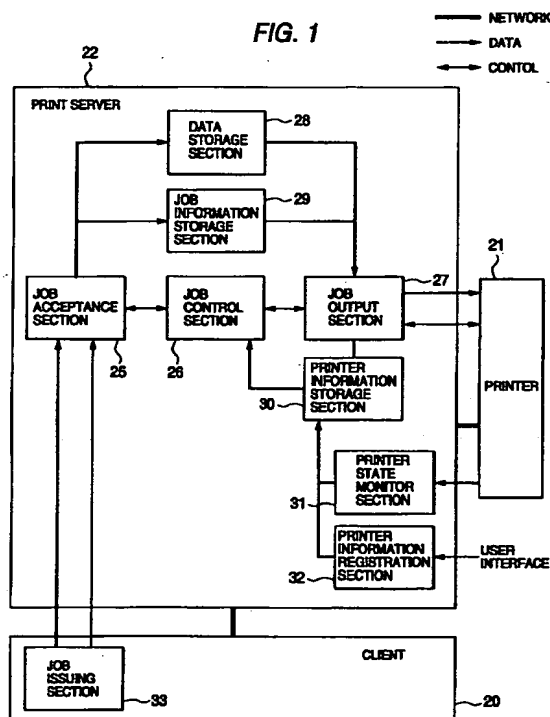

EP 0 738 949 A1

BEST AVAILABLE COPY

## Description

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

This invention relates to a print system comprising a print server, one or more clients, and one or more printers connected via a network and in particular to a print system which executes a print request issued from each client to each printer through the print server and enables the printer to provide a function that the printer itself does not originally have by support of the print server.

#### 2. Description of the Related Art

Various types of printers often coexist in a network environment in which a plurality of clients and a plurality of printers are connected to a network. Thus, if the client user requests a given printer to print by a given print method, the print method does not match print service of the printer and the print result as desired by the client user cannot be provided. For example, although the user specifies enlargement, reduction, or so-called n-up (a function of printing n-page print data on a sheet of paper), if the printer cannot provide the specified print service, the print result as desired by the user cannot be provided. To select a printer, the user must know which printer executes what print service by what method for selecting the printer fitted to the print job; printer selection is troublesome. Further, printer selection flexibility also lessens.

Patent documents related to the invention are Japanese Patent Unexamined Publication Nos. Sho. 62-191917, Hei. 3-252748, and Hei. 4-130919.

In the art disclosed in Japanese Patent Unexamined Publication No. Sho. 62-191917, when a given file is printed on a given printer, if control code not used with the printer is contained in the file, the control section gets control code that can be used with the printer in place of that control code. However, this document does not mention print in a network environment in which a print server supports printers via a network, and does not cope with the situation that occurs when the specified printer does not support the print method specified by the user.

Japanese Patent Unexamined Publication No. Hei. 3-252748 discloses a remote output unit connected to a central electronic computer system over a circuit. However, this document only discloses that the processing result of the central computer system are output on the remote output unit; this document does not mention print in a network environment in which a print server supports printers via a network, and does not cope with the situation that occurs when the specified printer does not support the print method specified by the user.

Japanese Patent Unexamined Publication No. Hei. 4-130919 discloses that a host computer inquires of a

unit if it has necessary resources of a font, etc., and that if it does not have the resources, the host computer transfers the resources to the unit. However, this document does not mention print in a network environment in which a print server supports printers via a network, and does not cope with the situation that occurs when the specified printer does not support the print method specified by the user.

### 10 SUMMARY OF THE INVENTION

It is therefore an object of the invention to provide a print system which even if a printer does not support a print method specification of a client in an environment in which a print server, one or more clients, and one or more printers are connected via a network, enables the printer to print by the print method under support of the print server.

According to a first aspect of the invention, there is provided a print system comprising a print server, one or more clients, and one or more printers connected on a network, the print server comprising: means for accepting a print job having job information containing execution printer specification information and print method specification information and a print file, sent from the client; means for reconstructing the print job so that, of the print methods specified in the print method specification information of the job information, a print method with which the printer specified in the execution printer specification information of the job information is not provided is provided as a method available with the printer; and means for sending the reconstructed print job to the printer specified in the execution printer specification information of the job information.

According to a second aspect of the invention, there is provided a print server connected to one or more clients and one or more printers via a network, the print server comprising: means for accepting a print job having job information containing print execution printer specification information and print method specification information and a print file, sent from the client; means for reconstructing the print job so that, of the print methods specified in the print method specification information of the job information, a print method with which the printer specified in the execution printer specification information of the job information is not provided is provided as a method available with the printer; and means for sending the reconstructed print job to the printer specified in the execution printer specification information of the job information.

According to a third aspect of the invention, there is provided a print method using a print server, one or more clients, and one or more printers connected on a network, the print server executing the steps of: accepting a print job having job information containing print execution printer specification information and print method specification information and a print file, sent from the client; reconstructing the print job so that, of the print methods specified in the print method specifi-

cation information of the job information, a print method with which the printer specified in the execution printer specification information of the job information is not provided is provided as a method available with the printer; and sending the reconstructed print job to the printer specified in the execution printer specification information of the job information.

According to a fourth aspect of the invention, there is provided a print method using a print server, one or more clients, and one or more printers connected on a network, the method comprising the steps of: sending by the client a print job including at least a print file and job information containing execution printer specification information and print page specification information to the print server; sending by the print server, data contained in the print file and specified in the print page specification information to the printer specified in the execution printer specification information; and printing the data by the specified printer.

According to a fifth aspect of the invention, there is provided a print system comprising a print server, one or more clients, and one or more printers connected on a network, the print server comprising: means for accepting a print job including at least a print file and job information containing execution printer specification information and print page specification information, sent from the client; and means for sending data contained in the print file and specified in the print page specification information to the printer specified in the execution printer specification information.

According to a sixth aspect of the invention, there is provided a computer program product that can be executed by a computer for controlling the computer for executing the steps of: accepting a print job having job information containing execution printer specification information and print method specification information and a print file; reconstructing the print job so that, of the print methods specified in the print method specification information of the job information, a print method with which the printer specified in the execution printer specification information of the job information is not provided is provided as a method available with the printer; and sending the reconstructed print job to the printer specified in the execution printer specification information of the job information.

#### BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawings:

Figure 1 is a block diagram showing the main part of an embodiment of the invention;

Figure 2 is a block diagram showing a network system to which the embodiment of the invention is applied;

Figure 3 is a block diagram showing the configuration of a job output section in the main part of the embodiment of the invention;

Figure 4 is a general flowchart showing the operation of the embodiment of the invention;

Figure 5 is a flowchart showing the printer registration operation of the embodiment of the invention;

Figure 6 is a general flowchart showing a print job process of the embodiment of the invention;

Figure 7 is a flowchart explaining the operation of the job output section of the embodiment of the invention;

Figure 8 is a flowchart explaining the operation of a job reconstruction section of the job output section of the embodiment of the invention;

Figure 9 is an illustration showing an example of job information according to the embodiment of the invention;

Figure 10 is an illustration explaining the result of print executed according to the job information in Figure 9;

Figure 11 is an illustration showing an example of print information of the embodiment of the invention;

Figure 12 is an illustration showing simplified definition of the print information in Figure 11;

Figure 13 is an illustration showing a job reconstruction example in the embodiment of the invention;

Figure 14 is a flowchart explaining the job correction operation of the embodiment of the invention; and

Figure 15 is a flowchart explaining the job cancellation operation of the embodiment of the invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to the accompanying drawings, there is shown a preferred embodiment of the invention.

Figure 2 is a whole block diagram showing a network system formed by the embodiment, wherein a plurality of clients 20, a plurality of printers 21, and a print server 22 are connected to a network 23. A plurality of printers 24 are connected directly to the print server 22. Each client 20 sends a print job to the print server 22 via the network 23. The print server 22 uses the printer 21 or 24 specified by the client 20 for printing. That is, when the printer 24 is specified, the print job is sent directly to the printer 24; when the printer 21 is specified, the print job is redirected to the printer 21 via the network 23. When the print job passes through the print server, it is reconstructed if necessary. This topic will be described later in detail.

Figure 1 is a block diagram centering on the configuration of the print server 22, wherein the print server 22 has a job acceptance section 25, a job control section 26, a job output section 27, a data storage section 28, a job information storage section 29, a printer information storage section 30, a printer state monitor section 31, and a printer information registration section 32. The client 20 has a job issuing section 33.

The job issuing section 33 of the client 20 sends a printer job consisting of a print file and job information to the print server 22. The job information contains user-specified information, such as information concerning the number of copies, paper size, enlargement or reduction, page specification, and n-up.

The job information is described, for example, in a format as shown in Figure 9. In this example, portrait as the Print direction, 4-up, forward page order, pages 1-8, equal scaling, and A4-size paper are specified. If normal print is executed based on the job information, the print result as shown in Figure 10 is provided.

The printer information registration section 32 in Figure 1 has a predetermined user interface function through which supported printers 21 and 24 and printer attributes can be specified. Various specifications are held in the printer information storage section 30. The printer information registration section 32 will be discussed later in detail. The printer state monitor section 31 communicates with the printer periodically in accordance with a protocol described below, detects an abnormal condition in the printer 24 or a communication path, and notifies the job control section 26 of a normal or abnormal condition.

When the job issuing section 33 of the client 20 issues a print job, the job acceptance section 25 of the print server 22 accepts it, supplies the print file and job information contained in the print job to the data storage section 28 and the job information storage section 29 respectively, and notifies the job control section 26 of acceptance of the print job. The job control section 26 schedules print job execution and rejects sending the print job to an abnormal printer based on detection of the printer state monitor section 31. The job control section 26 supplies the print job to the job output section 27 according to the scheduling. The job output section 27, which is provided for each of the printers 21 and 24, executes job reconstruction described below, if necessary, before transferring the print job to the printer 21 or 24.

Figure 3 is a block diagram showing the configuration of the job output section 27, which has a request acceptance section 34, a job reconstruction section 35, a file transfer section 36, a job information acquisition section 37, a printer information acquisition section 38, a printer state monitor section 31, and a result transfer section 39. The request acceptance section 34 sends a job accepted from the job control section 26 (Figure 1) to the job reconstruction section 35, which then reconstructs the job, if necessary, based on printer information provided from the printer information acquisition section 38 and job information provided from the job information acquisition section 37, and transfers it to the file transfer section 36, which then transfers the job to the printer. In Figure 3, the printer state monitor section 31 is provided in the job output section 27, because the printer state is detected using the print protocol executed by the job output section 27, as described below. Of course, the printer state monitor section 31 may be

provided independently of the job output section 27, as shown in Figure 1.

Next, the operation of the embodiment will be discussed.

Figure 4 is a general flowchart showing the operation of the embodiment of the invention. In the figure, first the print server 20 is started at step S1. Next, printers are registered in the print server 20 at step S2, wherein printers 24 connected directly to the print server 20 and the printers 21 connected via the network are registered together with printer information. Registration of the printer information will be described later in detail. Upon completion of the printer registration, the print server 22 enters the print job wait state at step S3. When a print job is sent from the client 20, it is accepted and stored at step S4. The job output section 27 of the print server 22 takes out printer information and job information from the print job at step S5, and checks whether or not the print job is within the support range at step S6 based on a list of the printer type names and services supported by the job reconstruction section 35 in the printer information, as described below in detail. If the print job is outside the support range, the client 20 is notified of an error and the process terminates at step S12. On the other hand, if the print job is in the support range, further a check is made to see if job reconstruction is required at step S7 based on a list of reconstruction support services in the printer information, as described below in detail. If reconstruction is not required, the job is sent directly to the printer at step S9; if reconstruction is required, the job is reconstructed at step S8, then the resultant job is sent to the printer at step S9. If the job is sent normally at step S10, the client is notified of the transmission result at step S11 and the process is terminated; if the job is not sent normally at step S10, the client is notified of an error at step S12 and the process is terminated.

Figure 5 is a flowchart showing the registration process of printers supported by the print server 22 (step S2 in Figure 4). The printers are registered using a predetermined user interface, whereby printer information as shown in Figures 11 and 12 is created for each supported printer. Figure 11 shows an actual definition example and Figure 12 shows what is defined in Figure 11. As shown in the figures, the printer model name and various services supported by the job reconstruction section 35 are defined in the printer information. Upon completion of the registration for each printer, the job output section 27 providing services for each printer in accordance with the registered services is generated. For convenience of the description, only one job output section 27 is shown in the figure.

When the printer information is created for each printer and the corresponding job output sections 27 are generated, each job output section 27 notifies the job control section 26 of the location of the printer information on the assigned printer (location in the printer information storage section 30) and the name of the job output section, and the job control section 26 reads and

registers them as internal data at step S21 in Figure 5. When the registration results in failure at step S22, the registration of the printer is canceled at step S24. When the registration results in success at step S22, a check is made to see if the printer and the path to the printer operate normally at step S23. That is, a print request file listing command lpq of a print protocol lpd (Line Printer Daemon Protocol) is sent to the printer to which the job is to be redirected. If the lpq command results in success at step S25, the printer to which the job is to be redirected and the path are normal, then the job output section 27 enters the job wait state from the job control section 26 at step S26. On the other hand, when lpq results in failure at step S25, the job output section 27 notifies the job control section 26 of an error at step S27. Later, lpq is again issued at step S28 and if lpq results in success at step S29, the job output section 27 enters the job wait state from the job control section 26 at step S26. After this, error detection using the lpq is repeated for the job control section 26 to hold the most recent printer and path state information. The printers 24 connected directly to the print server 22 and the related paths are monitored according to the usual procedures proper to the printers.

Figure 6 is a flowchart mainly showing the detailed operation of the job issuing section 33 of the client 20 and the job acceptance section 25 and the job control section 26 of the print server 22. In the figure, first the job issuing section 33 of the client 20 sends a print file and job information to the print server 22 at step S31. The job acceptance section 25 of the print server 22 accepts the print file and job information and stores them in the print file storage section 28 and the job information storage section 29 at step S32 and notifies the job control section 26 of acceptance of the job at step S33. Based on the job information, the job control section 26 determines the job output section 27 as the destination at step S34 and checks whether or not the page description language of the print job matches the page description language supported by the job output section 27 at step S35. If they match, the job control section 26 goes to the following step S36; if they do not match, the page description language is converted at step S37. After this, the job control section 26 schedules the job at step S38 and if the job can be executed immediately, the job control section 26 sends it to the job output section 27 at step S39; if the job cannot immediately be executed, the job control section 26 waits until the output timing and then sends the job to the job output section 27 at step S40.

Figure 7 is a flowchart showing the operation of the job output section 27, wherein the job output section 27 accepts a job number and print instruction from the job control section 26 at step S41. The job output section 27 takes out job information and print file from the job based on the job number at step S42 and further gets the corresponding printer information at step S43. After this, the job output section 27 checks whether or not the instruction specified in the job information is within the

range supported by the printer (also containing services supported by the job reconstruction section 35 of the job output section 27) at step S44. If it is not in the support range at step S45, the job output section 27 notifies the job control section 26 of an error at step S51; if it is in the support range at step S45, the job output section 27 further checks whether or not reconstruction of the job is required at step S46. If reconstruction of the job is required, the job reconstruction section 35 is called for performing necessary processing for reconstructing the job at step S47. After this, a print request command lpr of the lpd protocol is used to send the job to the printer to which the job is to be redirected at step S48. The job is sent directly to the printer 24 connected directly to the print server 22. If reconstruction of the job is not required, the reconstruction process is skipped and the job is sent. When the job is sent normally at step S49, the job output section 27 notifies the job control section 26 of the normal end at step S50; if the job is not normally sent at step S49, the job output section 27 notifies the job control section of an error at step S51.

Figure 8 is a flowchart showing the operation of the job reconstruction section 35. In this example in the figure, paper size specification, page specification, n-up specification, and scaling specification are supported by the print server. That is, since a paper size change procedure varies from one printer to another, if paper size specification is contained, the paper size change procedure needs to be embedded in the file. In the example, since the execution printer does not have the n-up, page specification, or scaling function, the print server needs to support the services. Of course, to add other services to the printer, the job needs to be reconstructed in response to the services. For example, the job can be reconstructed so as to print the printer installation place and a message to the user.

In Figure 8, first the print file is taken out in page units at step S61. Next, whether or not paper size specification exists is checked at step S62 and if it exists, a paper size change procedure is embedded in the job at step S63. Next, whether or not page specification exists is checked at step S64. If it exists, only the specified page is taken out for processing at step S66; if not, all pages are taken out for processing at step S65.

Next, whether or not n-up specification exists is checked at step S67. If it exists, a reduction process and a page relocation process are embedded in the job at step S68, as described later in detail. Next, whether or not scaling specification exists is checked at step S69 and if it exists, scale factor specification is embedded in the job at step S70. These steps are executed for all pages and the process is terminated at step S71.

Figure 13 is an illustration explaining the process of the job reconstruction section 35. In this example in Figure 13, the job information contains specification of paper size A4, 2-up, pages 2-5, and 0.5 scaling. The left is an original file and the right is a print file of the job reconstructed. In Figure 13, first the paper size change procedure and the scale factor change procedure are

embedded in the leading section of the reconstructed file, next the page end code position is changed. Further, coordinate conversion and scale factor conversion are executed in response to the 2-up (not shown).

Next, job correction and cancel by the user will be discussed with reference to Figures 14 and 15.

Figure 14 is a flowchart showing job correction by the user. In the figure, if the user specifies job correction, the job issuing section 33 of the corresponding client 20 sends the job number of the job to be corrected and the job information correction contents to the print server 22 at step S81. The job acceptance section 25 of the print server 22 accepts the correction information and sends it to the job control section 26 at step S82. The job control section 26 checks whether or not print is executed for the job to be corrected at step S83 and if print is not executed at step S84, corrects the job information at step S85. If print has been executed, the job control section 26 notifies the job acceptance section 25 that the job cannot be corrected at step S86. The job acceptance section 25 notifies the client 20 that the job cannot be corrected at step S87. In the embodiment, execution pages can be specified in the job information sent together with the print file, in which data other than the execution pages is also contained in the print file; although the page specification is changed with the correction instruction, the print server can cope with it without difficulty.

Figure 15 is a flowchart showing job cancel by the user. In the figure, the client 20 sends the job number of the job to be canceled and a request for canceling the job to the print server 22 at step S91. The job acceptance section 25 accepts the job number and the job cancel request at step S92 and sends them to the job control section 26 at step S93. The job control section 26 checks whether or not print is being executed for the job at step S94. If print is being executed at step S95, the job output section 27 notifies the job control section 26 of an error at step S99. If print is not being executed at step S95, the job control section 26 notifies the job output section 27 of cancel of the job at step S96 and the job output section 27 cancels transmission specified by the print request command lpr of the print protocol at step S97. When the transmission is canceled normally at step S98, the job output section 27 notifies the job control section 26 of the normal cancel at step S100; when the transmission cannot normally be canceled, the job output section 27 notifies the job control section 26 of an error at step S99.

In the actual implementation of the embodiment, the respective sections are provided by software executed in the print server 22, the client 20, and the printers 21 and 24, but some or all of the sections can also be provided by hardware.

As described above, according to the invention, the print server supports the printers connected to the network and if the user specifies a function not inherent in the printer, reconstructs the job so as to replace the function specification with a procedure that can be exe-

cuted on the printer; the print result as specified by the user can be provided on the printer. Therefore, the printers can be used by the clients as if they were high-function printers, remarkably improving the print environment and also lessening the situation in which the printer for which a job is destined does not have a sufficient function and the job is not executed.

## Claims

1. A print system comprising a print server, one or more clients, and one or more printers connected on a network, said print server comprising:

means for accepting a print job having job information containing execution printer specification information and print method specification information and a print file, sent from said client;

means for reconstructing the print job so that, of the print methods specified in the print method specification information of the job information, a print method with which the printer specified in the execution printer specification information of the job information is not provided is provided as a method available with the printer; and

means for sending the reconstructed print job to the printer specified in the execution printer specification information of the job information.

2. The print system as claimed in claim 1, wherein said print server further comprises printer registration means for specifying a printer supported by said print server and a print method supported by said print server for the supported printer, and wherein said job reconstructing means provides a procedure for providing the supported print method as a method available with the supported printer.
3. The print system as claimed in claim 2, wherein said print server further comprises means for monitoring an operation state of the supported printer and a path on the network from said print server to the supported printer.
4. The print system as claimed in claim 3, wherein said monitoring means sends a print request list acquisition command to the printer being monitored.
5. The print system as claimed in claim 1, wherein when the print method specification information of the print job contains paper size specification information, said reconstructing means reconstructs the print job with a paper size specification method proper to the printer specified in the execution printer specification information.

6. The print system as claimed in claim 1, wherein when the print information specification information of the print job contains print page specification information, said reconstructing means deletes data on an unspecified page for reconstructing the print job. 5
7. The print system as claimed in claim 1, wherein when the print information specification information of the print job contains page relocation specification information, said reconstructing means reconstructs the print job so as to relocate a page by a method available with the printer specified in the execution printer specification information. 10
8. The print system as claimed in claim 1, wherein when the print information specification information of the print job contains scaling specification information, said reconstructing means reconstructs the print job so as to execute scaling by a method available with the printer specified in the execution printer specification information. 15
9. The print system as claimed in claim 1, wherein when accepting a job cancel command, said print server disconnects network connection between said print server and the printer specified in the execution printer specification information. 20
10. The print system as claimed in claim 1, wherein when accepting a job correction command, said print server corrects the job information based on the job correction command. 25
11. A print server connected to one or more clients and one or more printers via a network, said print server comprising: 30
- means for accepting a print job having job information containing print execution printer specification information and print method specification information and a print file, sent from said client; 35
- means for reconstructing the print job so that, of the print methods specified in the print method specification information of the job information, a print method with which the printer specified in the execution printer specification information of the job information is not provided is provided as a method available with the printer; and 40
- means for sending the reconstructed print job to the printer specified in the execution printer specification information of the job information. 45
12. A print method using a print server, one or more clients, and one or more printers connected on a network, said print server executing the steps of: 50

accepting a print job having job information containing print execution printer specification information and print method specification information and a print file, sent from said client;

reconstructing the print job so that, of the print methods specified in the print method specification information of the job information, a print method with which the printer specified in the execution printer specification information of the job information is not provided is provided as a method available with the printer; and

sending the reconstructed print job to the printer specified in the execution printer specification information of the job information.

13. A print method using a print server, one or more clients, and one or more printers connected on a network, said method comprising the steps of:

sending by said client a print job including at least a print file and job information containing execution printer specification information and print page specification information to said print server;

sending by said print server, data contained in the print file and specified in the print page specification information to the printer specified in the execution printer specification information; and

printing the data by the specified printer.

14. A print system comprising a print server, one or more clients, and one or more printers connected on a network, said print server comprising:

means for accepting a print job including at least a print file and job information containing execution printer specification information and print page specification information, sent from said client; and

means for sending data contained in the print file and specified in the print page specification information to the printer specified in the execution printer specification information.

15. A computer program product that can be executed by a computer for controlling said computer for executing the steps of:

accepting a print job having job information containing execution printer specification information and print method specification information and a print file;

reconstructing the print job so that, of the print methods specified in the print method specification information of the job information, a print method with which the printer specified in the execution printer specification information of

the job information is not provided is provided  
as a method available with the printer; and  
sending the reconstructed print job to the  
printer specified in the execution printer speci-  
fication information of the job information.

5

10

15

20

25

30

35

40

45

50

55



**FIG. 1**

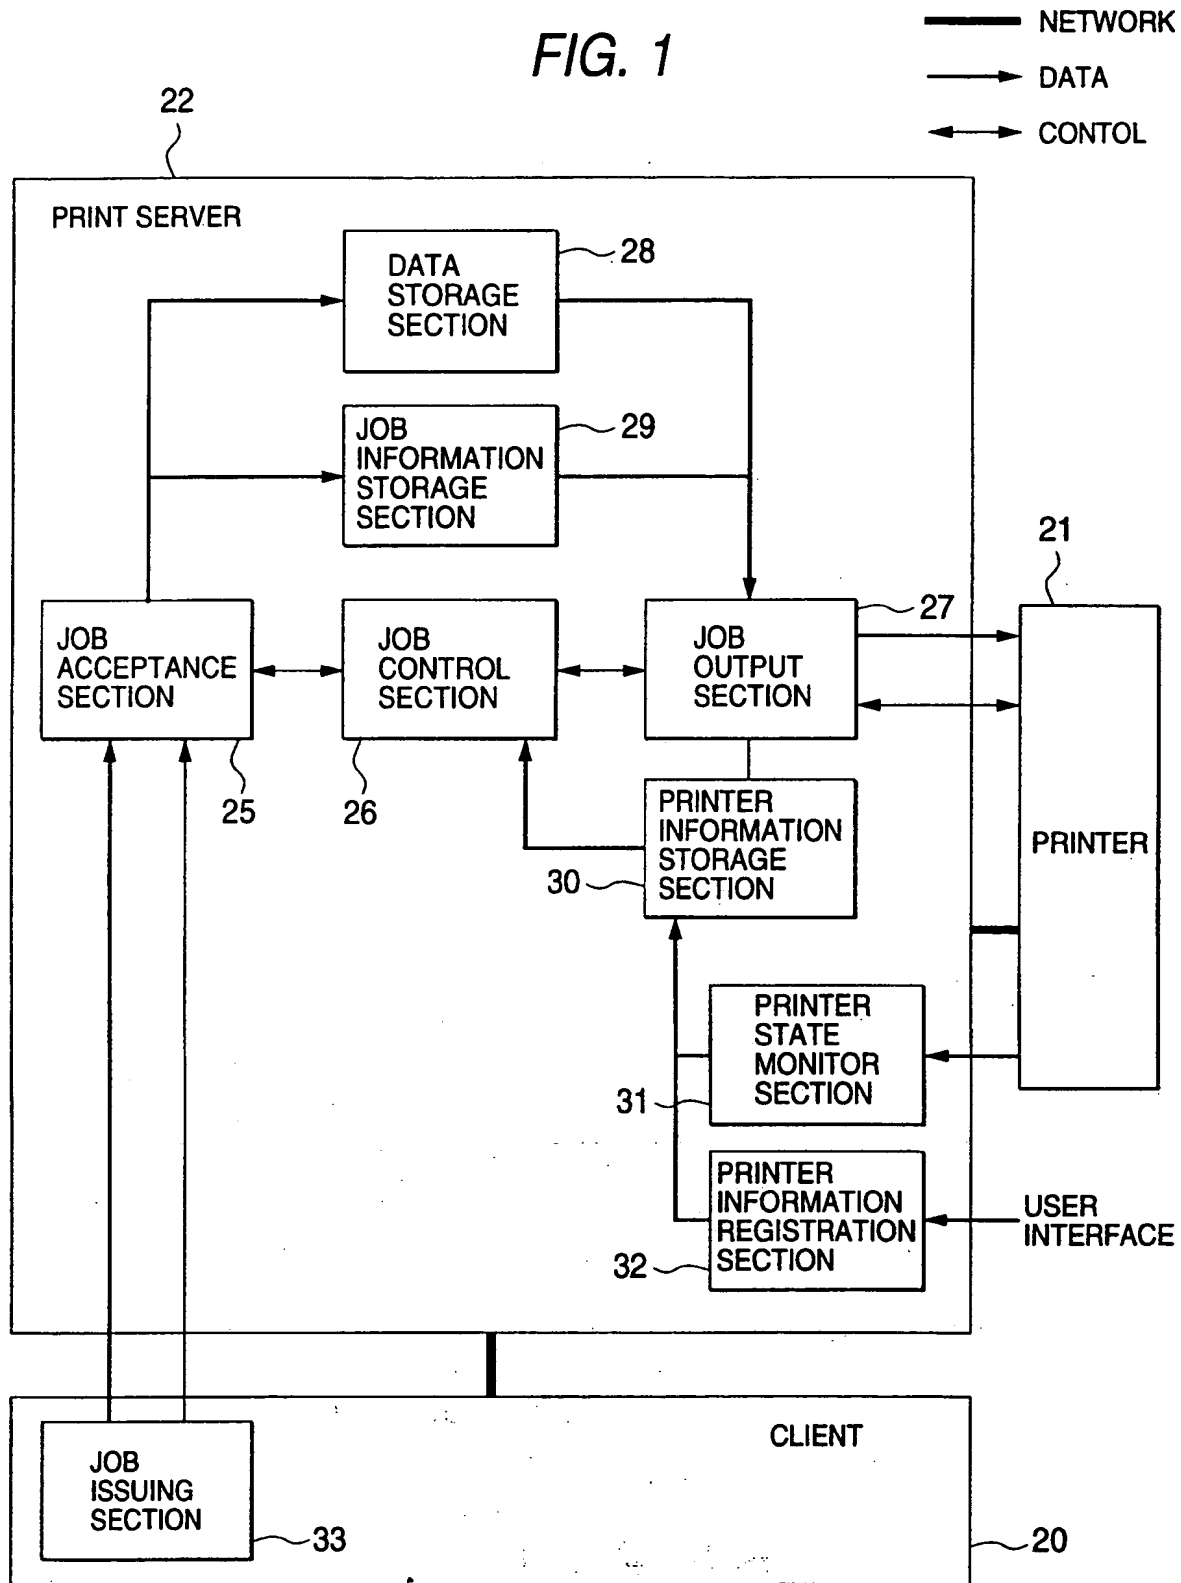


FIG. 2

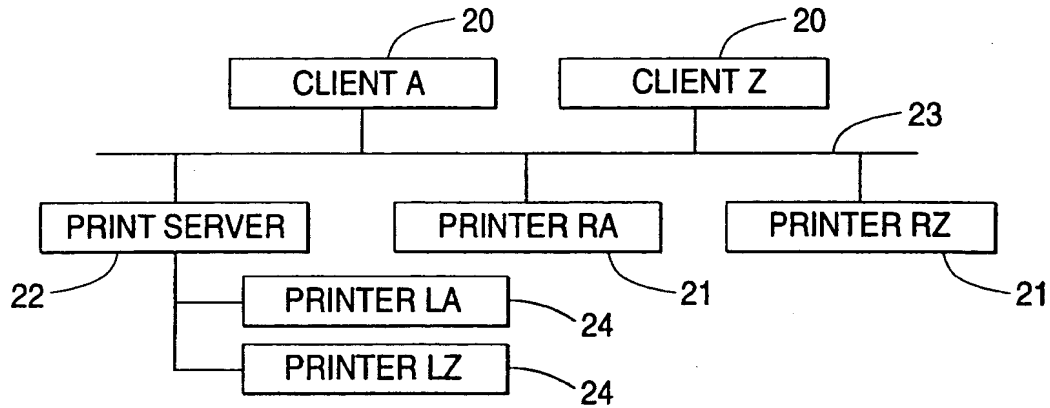


FIG. 3

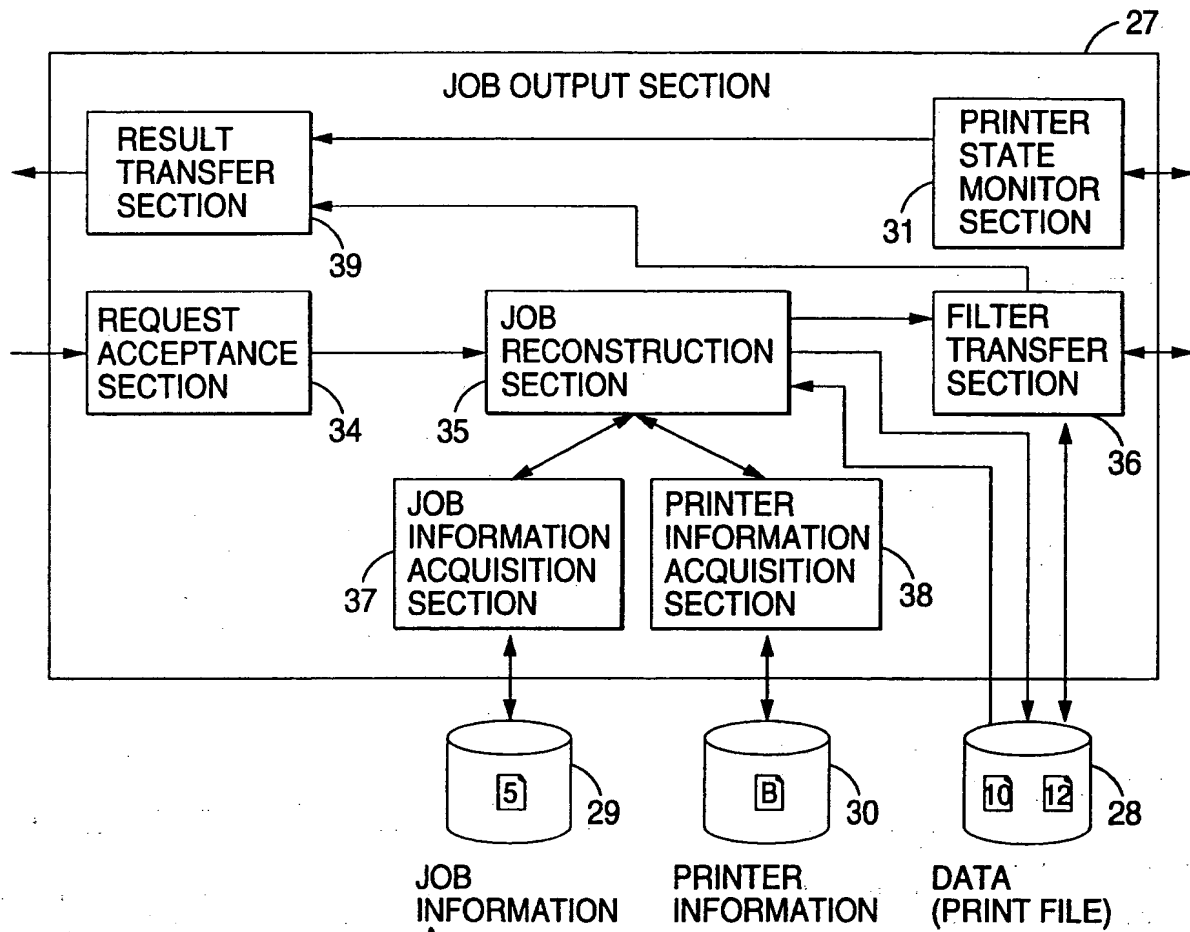


FIG. 4

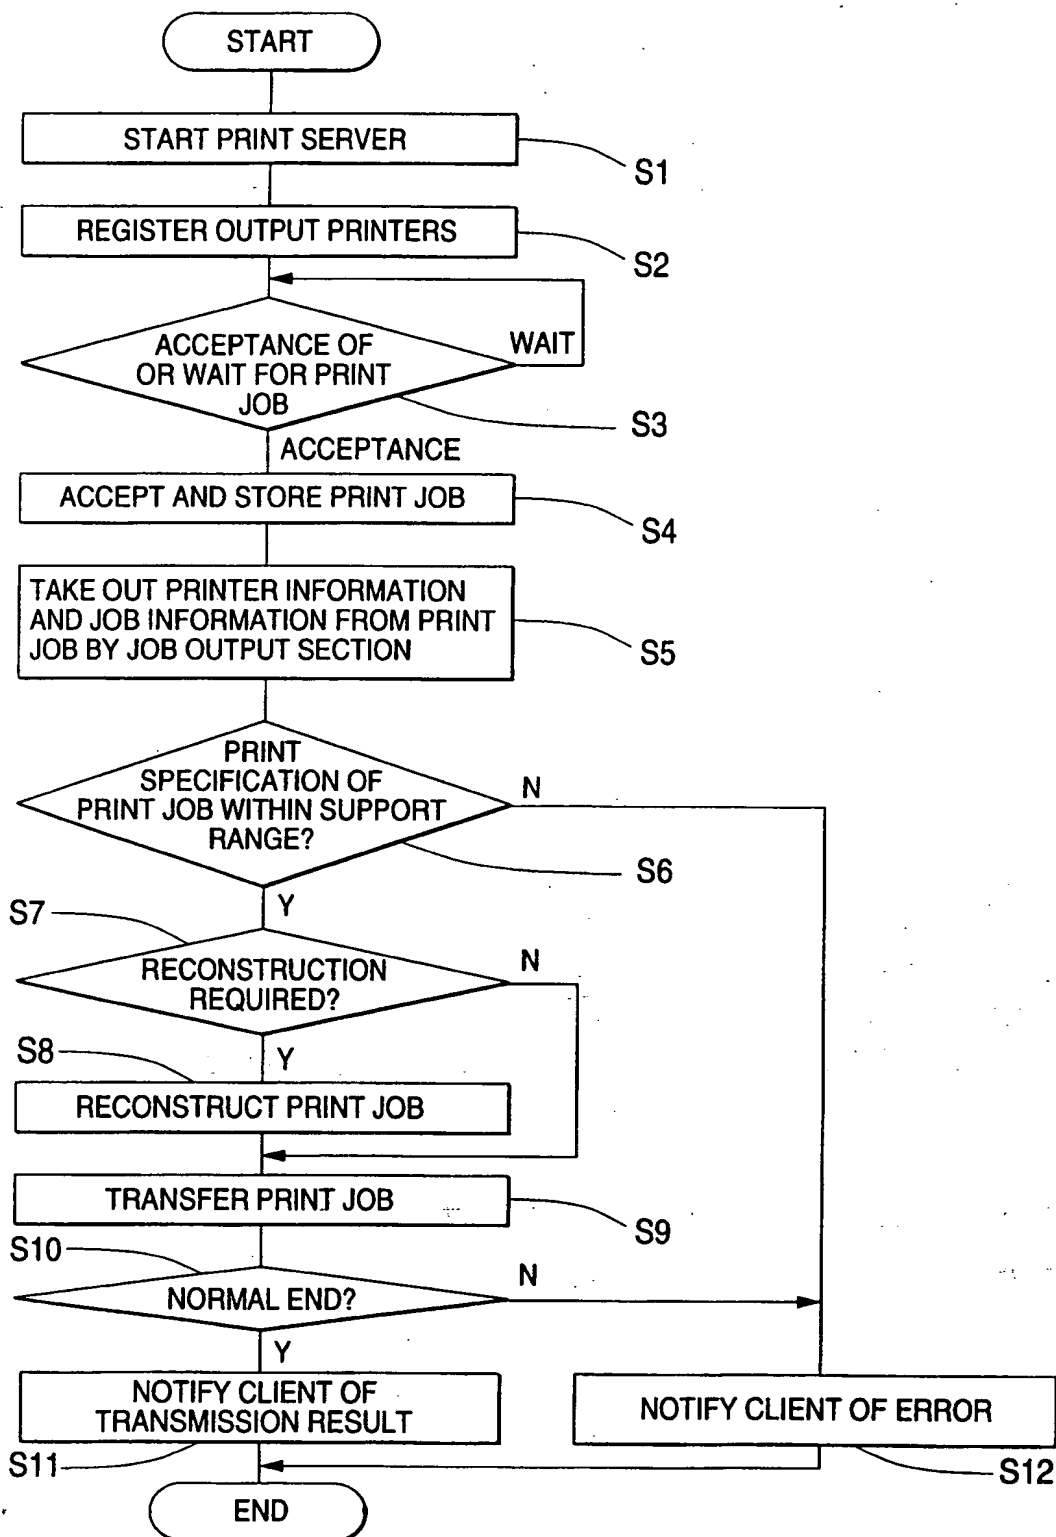


FIG. 5

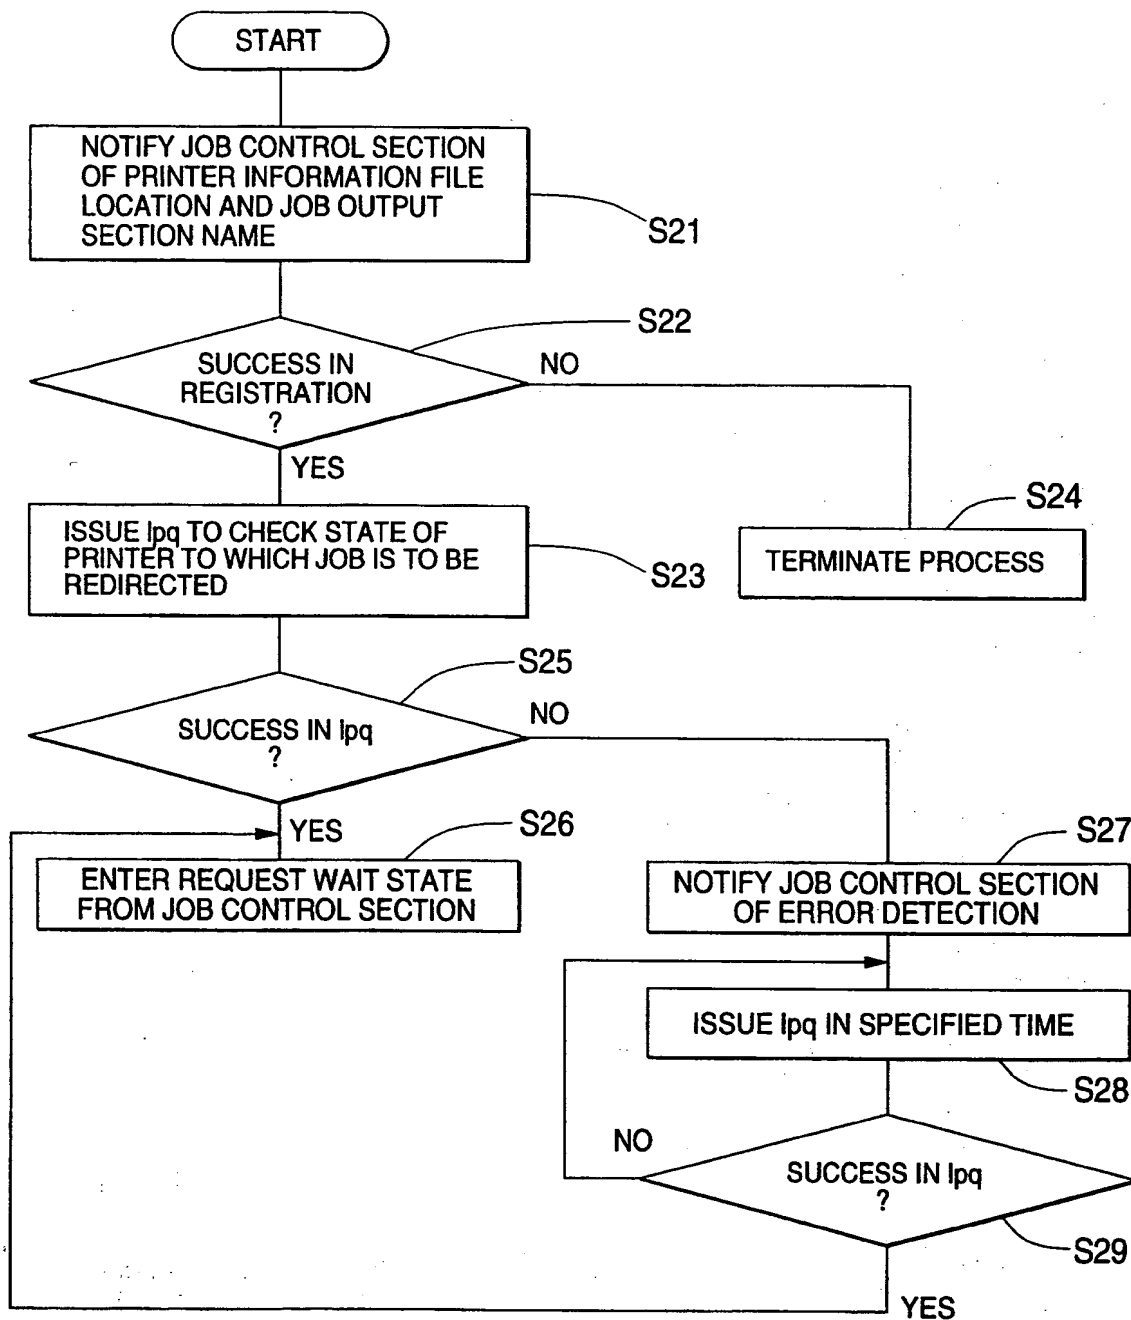


FIG. 6

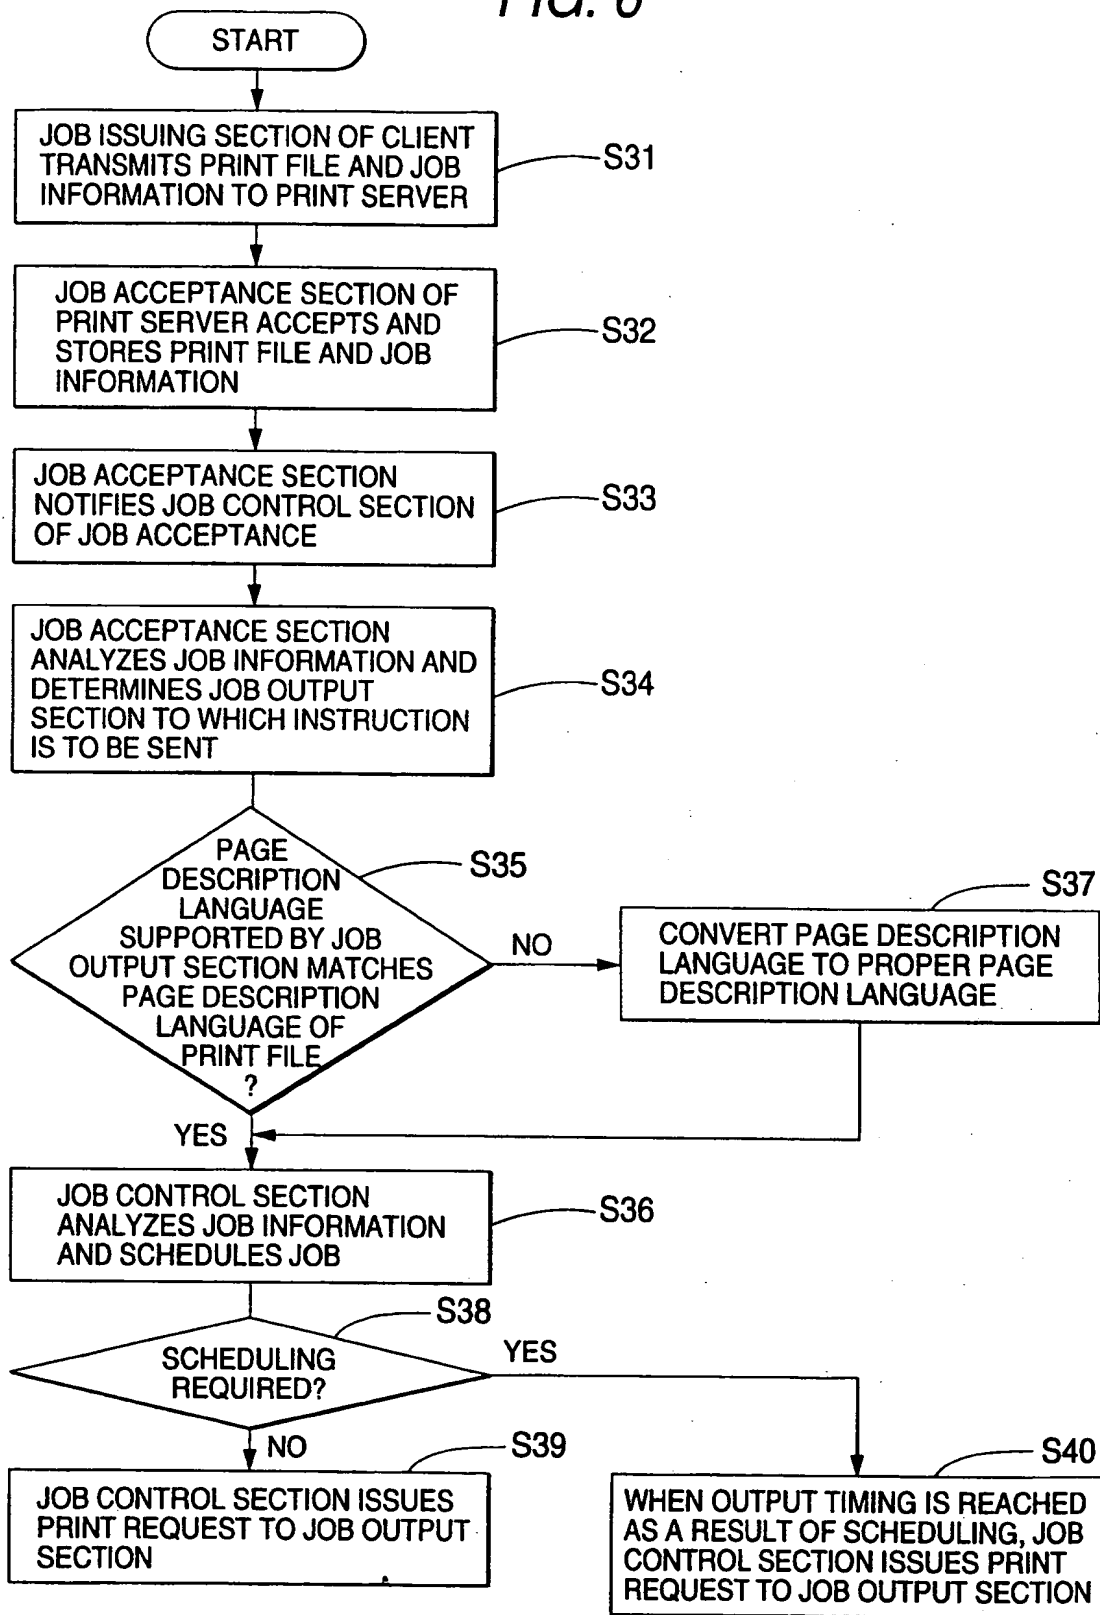


FIG. 7

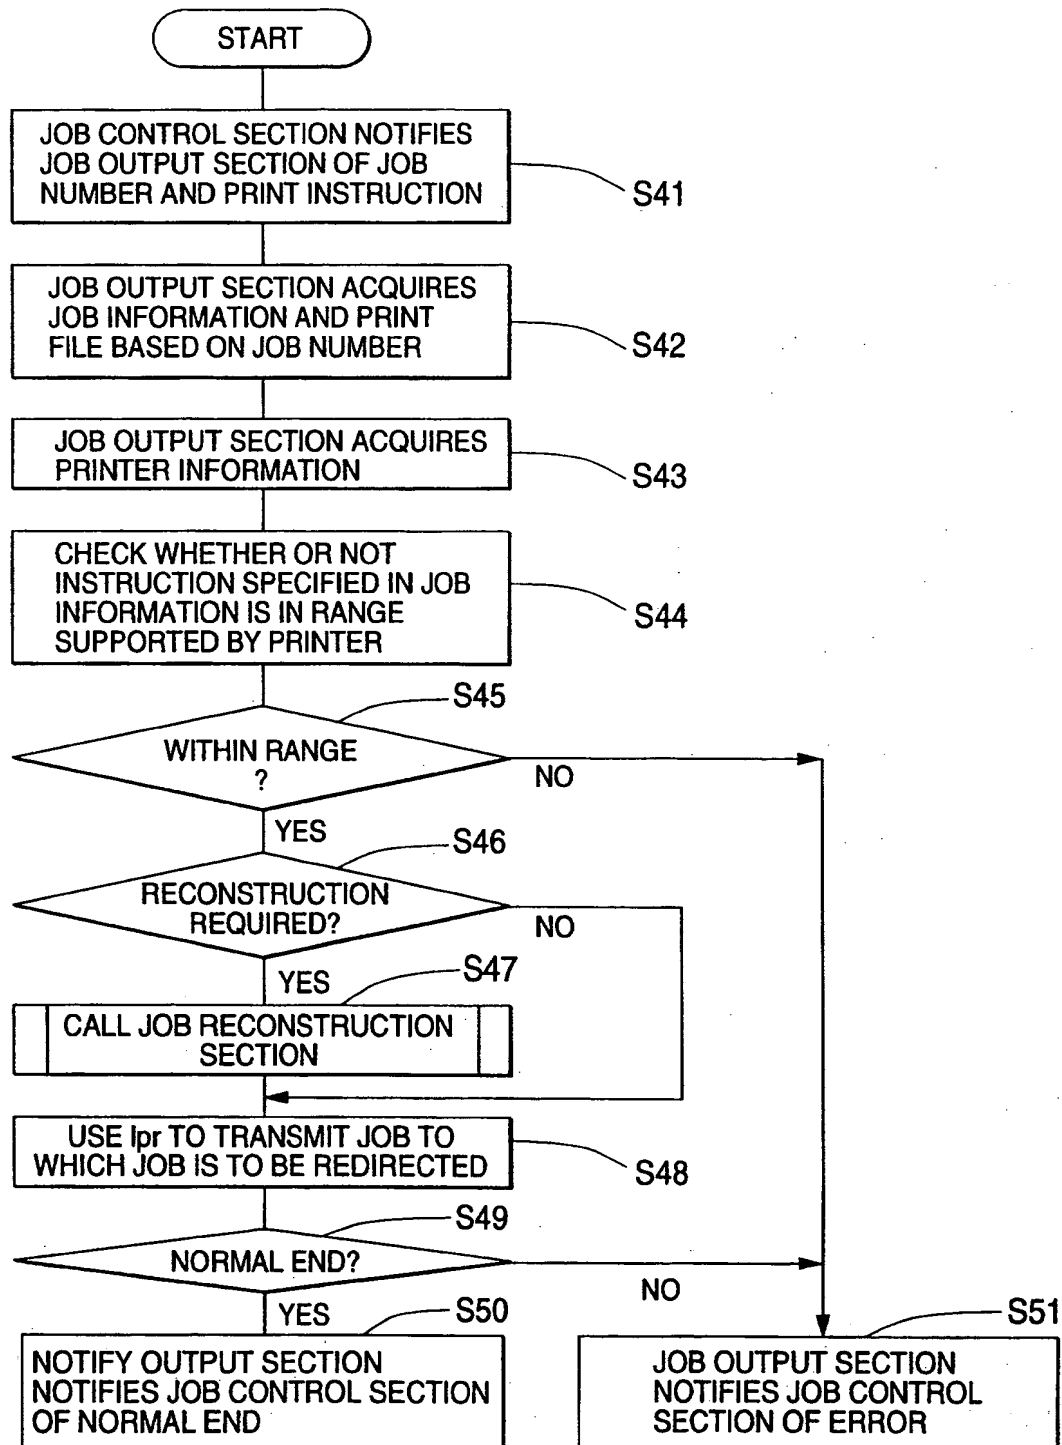
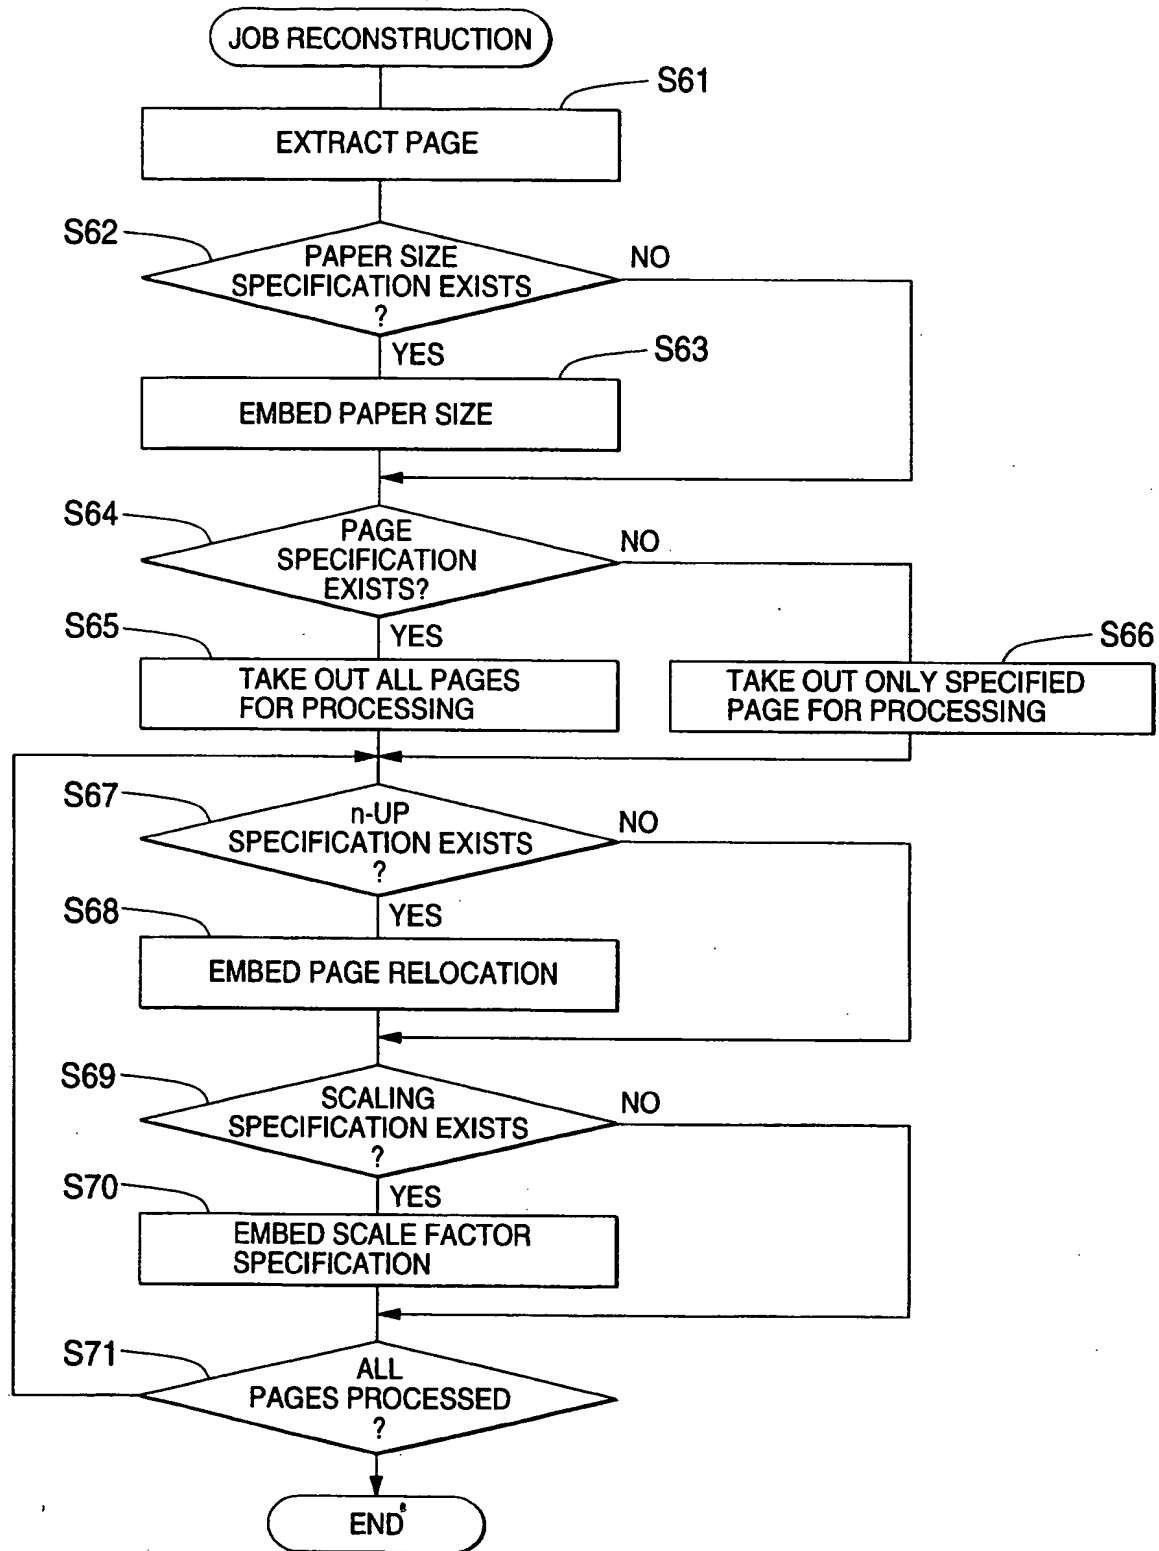



FIG. 8



**FIG. 9**

-att-content-orientation	-id-val-content-orientation-portrait
-att-imposition	-id-val-imposition-left-down-4-up
-att-page-order	-id-val-page-order-forward
-att-page-select	1 8
-att-logical-page-origin	-id-val-logical-page-origin-lower-left
-att-logical-page-scaling	1.0
-att-media-used	-id-val-medium-iso-a4-white

**FIG. 10**

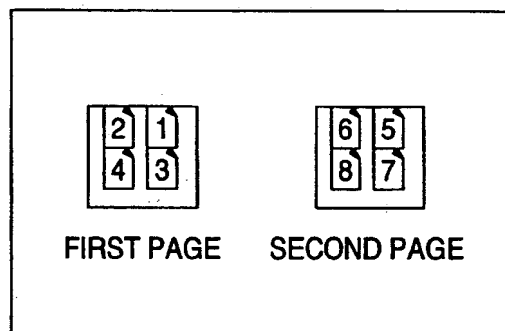



## FIG. 11

```

-printer-model      "FX415P2"
-media-supported id  -val-medium-iso-a4-white,\
                    id-val-medium-jis-b4-white,\
                    id-val-medium-jis-b5-white,\
                    id-val-medium-na-letter-white,\
                    id-val-medium-na-legal-white,\
                    id-val-medium-iso-a5-white,\
                    id-val-medium-iso-a3-white,\

-page-sizes-supported {id-val-medium-iso-a4-white," ", "3 dict dup/PageSize [595 842]
put dup/imagingBBox null put dup/inputAttributes 1 dict dup/Priority [0 1 2] put put
setpagedevice"},\
    {id-val-medium-jis-b4-white," ", "3 dict dup/PageSize [729 1032] put dup
/imagingBBox null put dup/inputAttributes 1 dict dup/Priority [0 1 2] put put
setpagedevice"},\
    {id-val-medium-jis-b5-white," ", "3 dict dup/PageSize [516 729] put dup
/imagingBBox null put dup/inputAttributes 1 dict dup/Priority [0 1 2] put put
setpagedevice"},\
    {id-val-medium-na-letter-white," ", "3 dict dup/PageSize [612 792] put dup
/imagingBBox null put dup/inputAttributes 1 dict dup/Priority [0 1 2] put put
setpagedevice"},\
    {id-val-medium-na-legal-white," ", "3 dict dup/PageSize [612 1008] put dup
/imagingBBox null put dup/inputAttributes 1 dict dup/Priority [0 1 2] put put
setpagedevice"},\
    {id-val-medium-iso-a5 -white," ", "3 dict dup/PageSize [420 595] put dup
/imagingBBox null put dup/inputAttributes 1 dict dup/Priority [0 1 2] put put
setpagedevice"},\
    {id-val-medium-iso-a3-white," ", "3 dict dup/PageSize [842 1191] put dup
/imagingBBox null put dup/inputAttributes 1 dict dup/Priority [0 1 2] put put
setpagedevice"}

-orientations-supported {id-val-content-orientation-portrait," ",""},\
    {id-val-content-orientation-reverse-portrait," ",""},\
    {id-val-content-orientation-landscape," ",""},\
    {id-val-content-orientation-reverse-landscape," ",""}

-impositions-supported {id-val-imposition-none,\
    {id-val-imposition-simple-2-up,\
    {id-val-imposition-reverse-2-up,\
    {id-val-imposition-simple-4-up,\
    {id-val-imposition-left-down-4-up,\
    {id-val-imposition-down-right-4-up,\
    {id-val-imposition-down-left-4-up

-document-formats-supported {id-val-document-format-PS, "PostScript", postScript\112"}

-page-orders-supported {id-val-page-order-forward," ",""},\
    {id-val-page-order-reverse," ",""}

-logical-page-origins-supported {id-val-logical-page-origin-lower-left," ",""}
-logical-page-scaling-range-supported {0, 100}

```

## FIG. 12

PRINTER MODEL NAME FX415P2

TYPES OF PAPER SUPPORTED BY JOB RECONSTRUCTION SECTION

A4, B4, B5, LETTER, LEGAL, A5, A3

SIZES OF PAPER SUPPORTED BY JOB RECONSTRUCTION SECTION AND  
POSTSCRIPT SPECIFICATION METHOD

DOCUMENT ORIENTATIONS THAT CAN BE RECOGNIZED BY  
JOB RECONSTRUCTION SECTION

NORMAL TRANSVERSE, TRANSVERSE TURNED UPSIDE DOWN,  
NORMAL LENGTH, LENGTH TURNED UPSIDE DOWN

n-UP SUPPORTED BY JOB RECONSTRUCTION SECTION

NONE, 2-UP OF 1, 2 FROM TOP TO BOTTOM, 2-UP OF 2, 1  
FROM TOP TO BOTTOM, 4-UP OF 1, 2, 4, 3 CLOCKWISE, 4-UP  
OF 2, 1, 3, 4 CLOCKWISE, 4-UP OF 1, 3, 4, 2 CLOCKWISE,  
4-UP OF 3, 1, 2, 4 CLOCKWISE

TYPES OF PAGE DESCRIPTION LANGUAGE SUPPORTED BY JOB  
RECONSTRUCTION SECTION

POSTSCRIPT

PAGE ORDERS SUPPORTED BY JOB RECONSTRUCTION SECTION

FORWARD, REVERSE

SCALING ORGINS SUPPORTED BY JOB RECONSTRUCTION SECTION

LOWER LEFT CORNER

SCALING RANGE SUPPORTED BY JOB RECONSTRUCTION SECTION

0 TO 100

FIG. 13

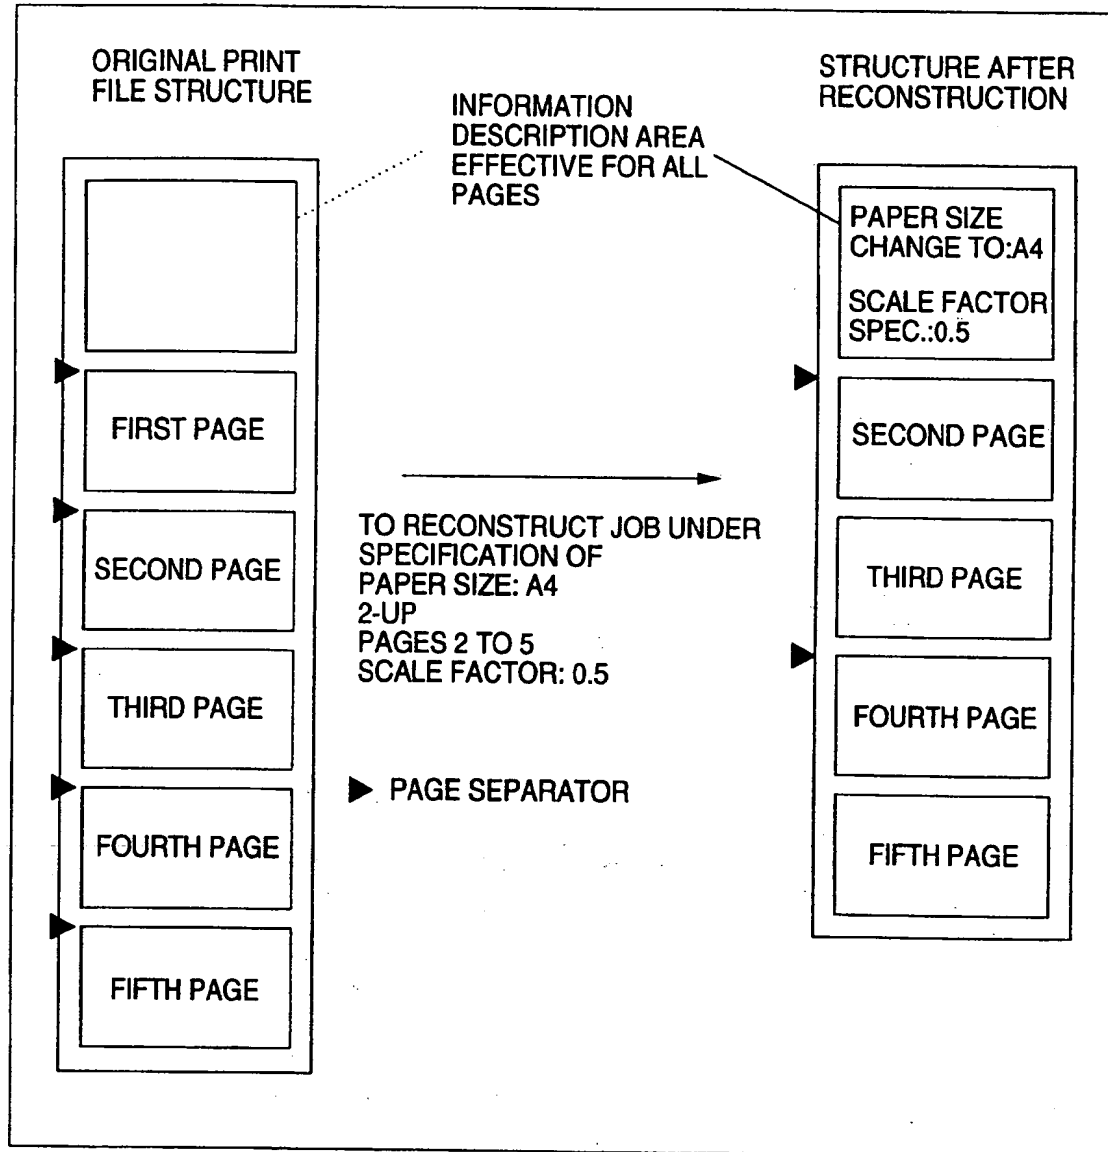


FIG. 14


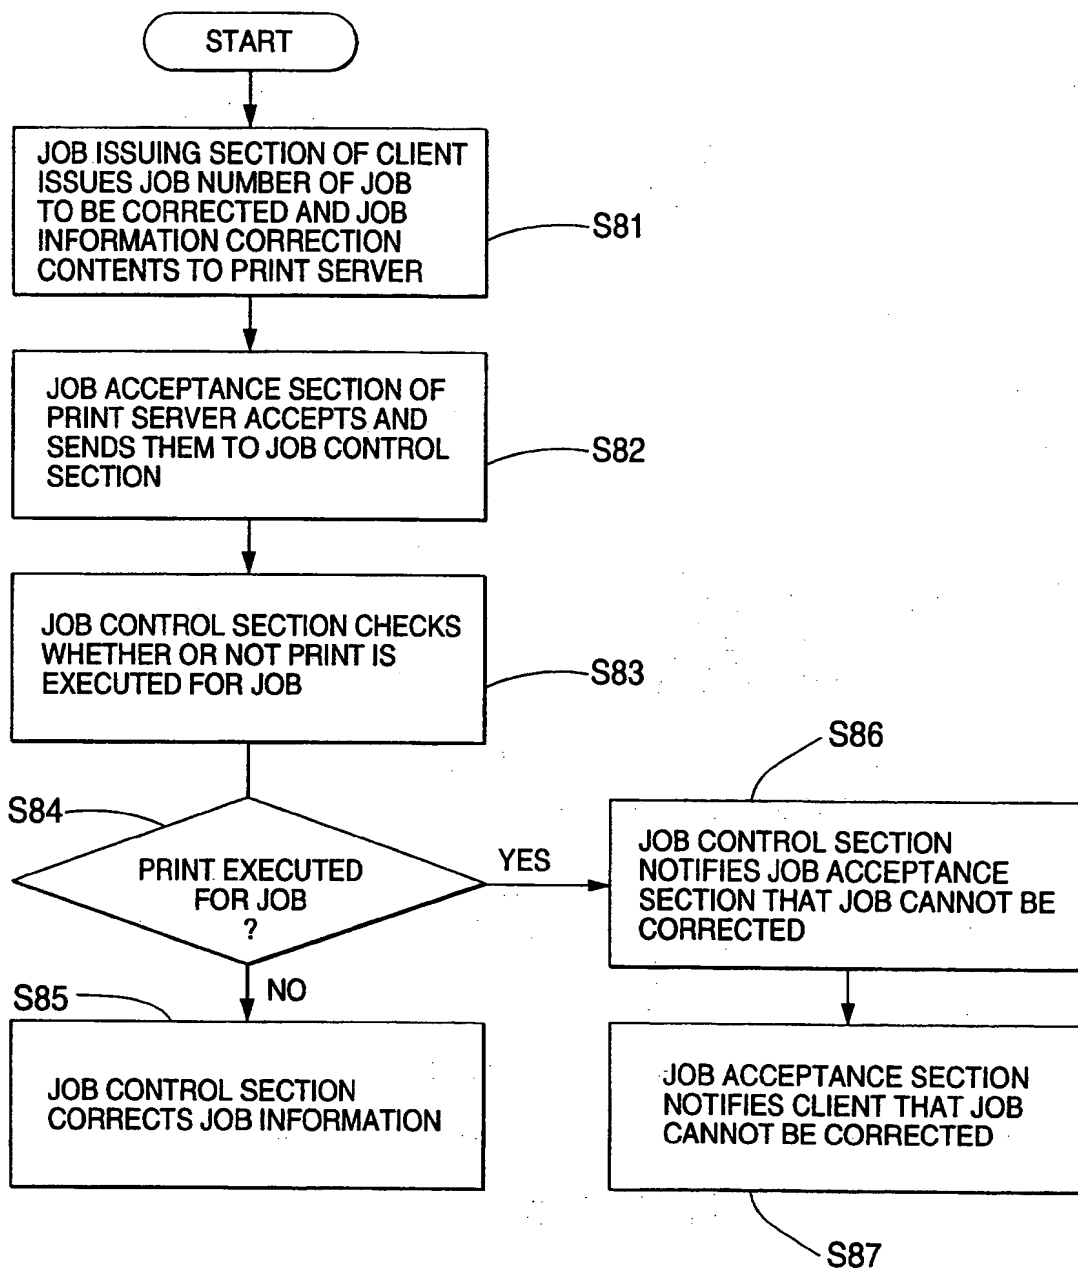


FIG. 15



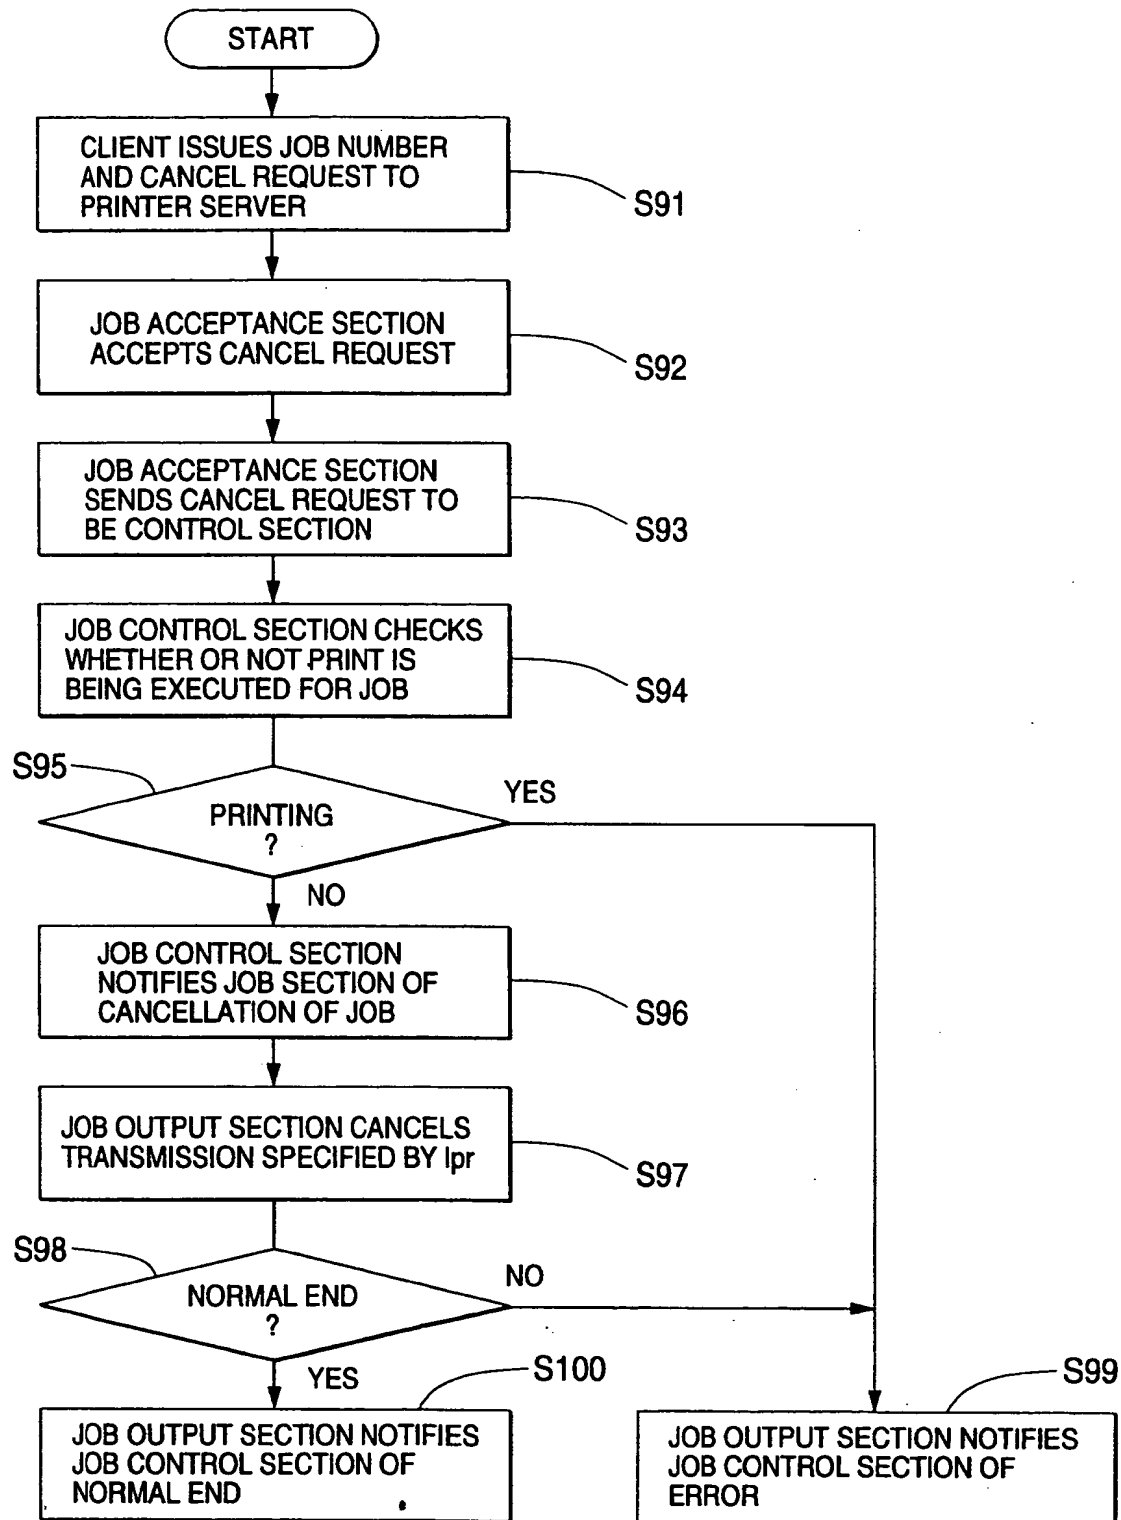

European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 95 11 6568

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	EP-A-0 618 529 (XEROX CORP) 5 October 1994 * the whole document *	1-3,5,8, 11-15	G06F3/00 G06F3/12
A	EP-A-0 588 513 (XEROX CORP) 23 March 1994 * the whole document *	1-5, 11-15	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			G06F
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 6 August 1996	Examiner Weiss, P
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 01/82 (P/M/C/D)